


NEOS LED Panel

The Neos slim panel from Phoenix features a premium and economy version with a long 50000 hour lifespan. The Neos can be surface, recess, plaster board and suspension mounted. It has both 100lm/W and 130lm/W options.



IP44

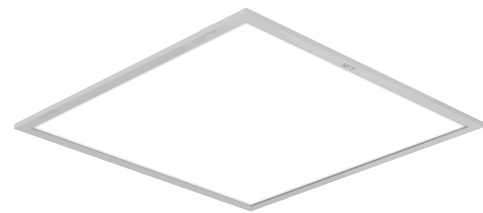

50,000H



AU 2pin plug



Dimmable*

Technical Specifications

| | |
|-------------------------|---|
| Operating Voltage | 200-240V AC 50/60Hz |
| Power Factor | 0.9 |
| EMC | AS/NZSCISPR15 |
| Safety | AS/NZS60598.1, AS/NZS60598.2.2 |
| Dimming/Control Options | Triac |
| Enclosure | V0 Fire Rated Housing |
| Optical Cover | PMMA Diffuser |
| Supply Connection | 2 Pin Plug |
| Installation | Recessed standard, options for ceiling, plaster board and suspension mounting |
| Efficacy | 100lm/W (E), 130lm/W (P) |
| CCT | 3000K, 4000K, 6000K |
| CRI | Ra>80 |
| LED Life | L70 / B50 >50000 Hours |

Ordering Codes

| PART NO | POWER (w) | LUMINOUS FLUX (LM) | CCT | Beam Angle | Dimensions |
|------------------|-----------|--------------------|-------|------------|--------------------|
| PLINEO036060648E | 36 | 3672 | 4000K | 110° | 596 x 596 x 11 mm |
| PLINEO025060648P | 25 | 3125 | 4000K | 110° | 596 x 596 x 11 mm |
| PLINEO036120348E | 36 | 3672 | 4000K | 110° | 296 x 1196 x 11 mm |
| PLINEO025120348P | 25 | 3125 | 4000K | 110° | 296 x 1196 x 11 mm |