

PHOENIX EcoFlood LED Floodlight

Features

The Phoenix EcoFlood is a sleek and reliable compact floodlight. Featuring an easy connect termination this makes the Phoenix EcoFlood a lighting solution suitable for a wide range of industrial and commercial applications.



IP65



IK08



-20°C



40°C



Typical Applications




Technical Specifications

Operating Voltage	100-277V AC 50/60Hz
Power Factor	≥0.9
EMC	AS/NZSCISPR15
Safety	AS/NZS60598.1, AS/NZS60598.2.5
Enclosure	Pressure diecast and powdercoated aluminium
Optical Cover	Toughened glass
Supply Connection	2.5mm ² terminal block
Installation	Trunion mount
Efficacy	80lm/W
CCT	3000K, 4000K or 5000K
CRI	Ra>70
LED Life	L70 / B50 >50000 Hours

PHOENIX EcoFlood LED Floodlight


Photometric Diagram

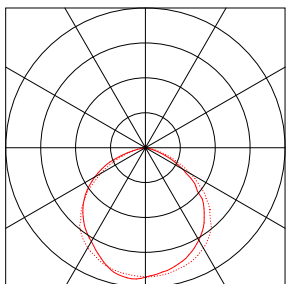

Accessories

PLIEFC-WG Wire Guard

Dimensions

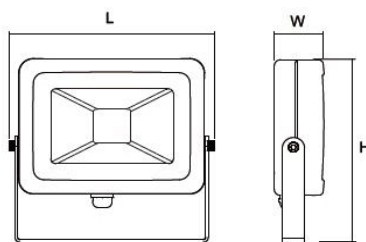

Ordering Codes

PART NO	POWER (w)	LUMINOUS FLUX (LM)	CCT(K)	DIMENSIONS (mm)
PLIECF01057	10	800	5000	130x37x117
PLIECF02057	20	1600	5000	165x40x152.5
PLIECF03057	30	2400	5000	235x49x207
PLIECF05057	50	3200	5000	280x55x248
PLIECF10057	100	1600	5000	330x65x306
PLIECF15057	150	2400	5000	440x75x408
PLIECF20057	200	3200	5000	440x75x408

Ordering Methodology

