1 LIGHTING 11.3 **O** h (Čs) 144 2 - Shine 24m 00

RUNNING MAN III

EXIT LIGHTING



RUNNING MAN III

The Running Man III is a LED weatherproof and energy efficient emergency exit light. It features both single and double sided decals with both the Running Man and Exit decals included.



TYPICAL APPLICATIONS



Switch Rooms, Control Rooms, Electrical Equipment Rooms, Tunnels, Industrial Warehouse, Office Complex, Workshops


SPECIFICATIONS

Model	PLIRM3
Optical Characteristics	
Rated Wattage	3W
Lumens	300
System Efficacy	100Lm/W
Colour Temperature CCT	5700K
CRI (Ra)	>70
Reported L70	>50,000 Hours
Lens Optic Type	Polycarbonate Diffuser
Viewing Distance	24M
Electrical Characteristics	
Input	240V
Frequency	50Hz
Powerfactor	>0.9
Operating Mode	
Operating System	Manual Test Switch
Charging Method	Constant Current (16hrs), Pulse Charge (Standby)
Total Harmonic Distortion	N/A
Environment	
IP Rating	IP65
Impact Rating	IK08
Operating Temperature	1°C To 40°C
Product Material and Mounting	
Option 1	Wall Mount
Product Material	Polycarbonate Body
Lens / Optics Material	PC Lens
Dimensions and Weights	
Product Dimensions	381*162*86
Product Weight	4.1KG
Packaging Dimensions (Ctn 10)	560*410*360
Weight (Ctn 10)	41.0KG
Certifications and Warranty	
Warranty	2 Year Warranty
Certifications	SAA
AS/NZ 2293 Classification	C0=E2.5 C90=D2.0

EXIT LIGHTING



DIMENSIONS

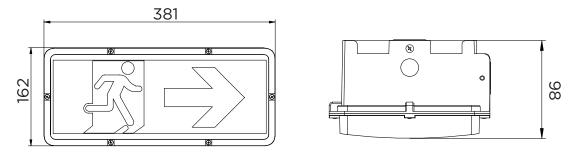



STANDARD DECAL SET



* Standard decal set included

ORDERING METHODOLOGY



WALL MOUNT BRACKET

PLIRM3/WM



