


Features

- 316 stainless steel 1.5mm & 2mm N4 finish
- Fully welded construction
- Panel rated at IP66
- Slotted mounting holes
- Polyurethane pour-in place gaskets
- Multiple sizes available
- Fully welded construction
- 30 degree sloped roof/ 60mm overhang
- Pintle hinges/ removable doors
- Padlockable Swing Handle MS860 series
- Sun shields (both sides/ top/ door)
- Lifting eyes and lugs, door stays (lifting lugs 1T rated)



TYPICAL APPLICATIONS

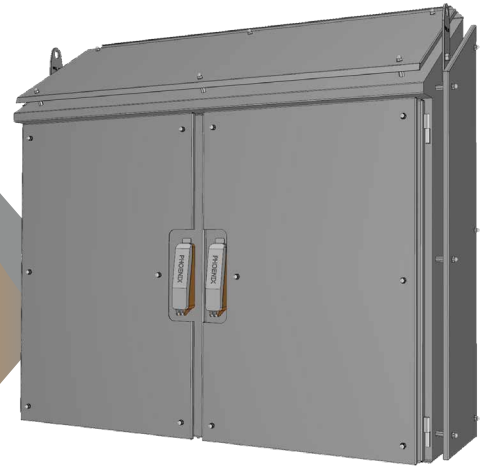

EXCALIBUR MINING EXTREME

Model No.		Enclosure Dimensions (mm)			Enclosure + Sun Shield Dimensions (mm)			Useable Depth
1.5mm Construction	2mm Construction	Height A	Width B	Depth C	Height A	Width F	Depth G	
PSMED1008040-1	PSMED1008040-2	1377	800	400	1377	890	467	382
PSMED10010040-1	PSMED10010040-2	1377	1000	400	1377	1090	467	382
PSMED10014040-1	PSMED10014040-2	1377	1400	400	1377	1490	467	382
PSMED12014040-1	PSMED12014040-2	1577	1400	400	1577	1490	467	382
PSMED16016040-1	PSMED16016040-2	1977	1600	400	1977	1690	467	382

