


EXCALIBUR MINING EXTREME SINGLE DOOR

Features

- 316 stainless steel 1.5mm & 2mm N4 finish
- Fully welded construction
- Panel rated at IP66
- Slotted mounting holes
- Polyurethane pour-in place gaskets
- Multiple sizes available
- Fully welded construction
- 30 degree sloped roof/ 60mm overhang
- Pintle hinges/ removable doors
- Padlockable Swing Handle MS860 series
- Sun shields (both sides/ top/ door)
- Lifting eyes and lugs, door stays (lifting lugs 1T rated)

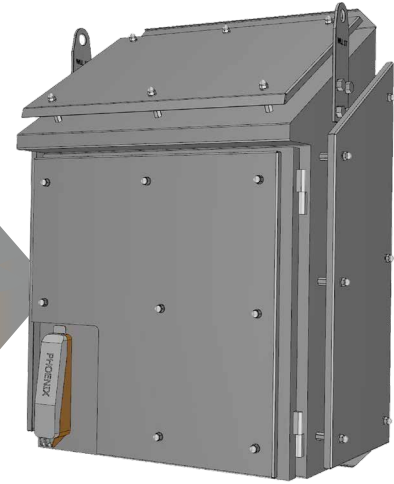

TYPICAL APPLICATIONS



EXCALIBUR MINING EXTREME

| Model No. | | Enclosure Dimensions (mm) | | | Enclosure + Sun Shield Dimensions (mm) | | | Useable Depth |
|--------------------|------------------|---------------------------|---------|---------|--|---------|---------|---------------|
| 1.5mm Construction | 2mm Construction | Height A | Width B | Depth C | Height A | Width F | Depth G | |
| PSMES404025-1 | PSMES404025-2 | 691 | 400 | 250 | 691 | 490 | 306 | 232 |
| PSMES604025-1 | PSMES604025-2 | 891 | 400 | 250 | 891 | 490 | 306 | 232 |
| PSMES606035-1 | PSMES606035-2 | 891 | 600 | 350 | 891 | 690 | 407 | 332 |
| PSMES705025-1 | PSMES705025-2 | 991 | 500 | 250 | 991 | 590 | 317 | 232 |
| PSMES705035-1 | PSMES705035-2 | 1048 | 500 | 350 | 1048 | 590 | 417 | 332 |
| PSMES1008025-1 | PSMES1008025-2 | 1291 | 800 | 250 | 1291 | 890 | 317 | 232 |
| PSMES1008040-1 | PSMES1008040-2 | 1377 | 800 | 400 | 1377 | 890 | 467 | 382 |

