

SAFELIGHT LED Emergency Light

The Safelight from Phoenix is a high performance led emergency luminaire. Featuring longlife led and LiFePo4 lithium battery, the exit light will provide reliable egress lighting in emergency situations.





Technical Specifications

Operating Voltage	240V AC 50/60Hz
Power Factor	0.9
EMC	AS/NZSCISPR15
Safety	AS/NZS60598.1, AS/NZS60598.2.22
Performance/Compliance	AS2293.3
Supply Connection	Australian 3 Pin Plug
Mounting	Recess mount
Spacing	D40
Emergency Duration	3 hours max
Battery	LiFePo4 6.4V, 1500mAh
Power Consumption	3W
Cut out	70mm
Trim	95mm, 145mm

Ordering Codes

PART NO	Description
PLISFE001	Phoenix Safelight LED Emergency

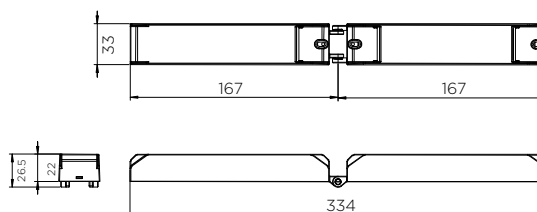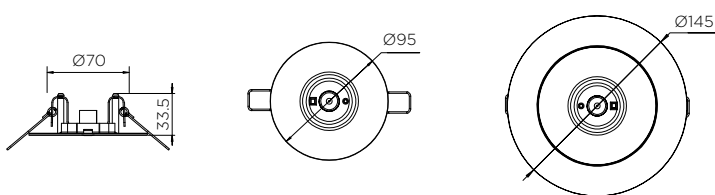

* Dimensions in mm